


UV DIRECT

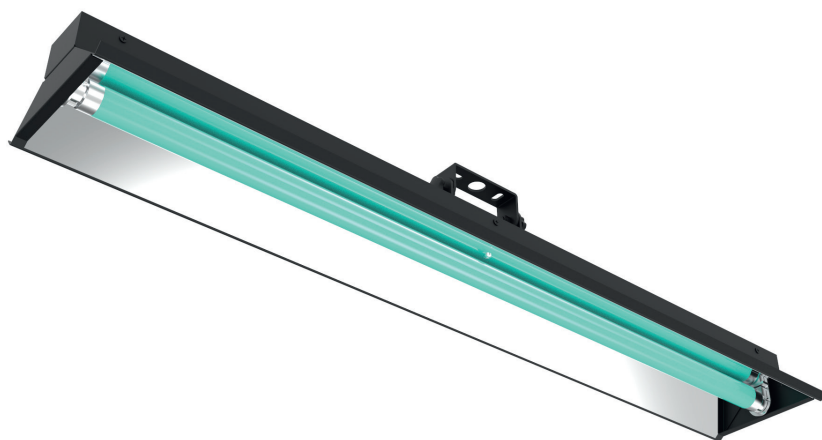

Technical data:

- Coverage area: up to 15 m²
- Power: 220-240V 50/60Hz
- Wattage: 32 W
- UVC on HF gear: min. 13,1 W
- Mass: ca. 3,1 kg
- Radiators replacement: once a year
- Protective foil for radiator - on request
- Mounting: wall, ceiling or tripod
- One Philips radiator (254nm UVC)
- Applications: air and surface disinfection and prevention of secondary infections. Eliminates bacteria, viruses, fungi, mold
- Use in production halls, hospitals, health care facilities, pharmacies, in public transport and many others

Accessories: wireless control, movement sensor.



Index no.	Power [W]	Weight [kg]
7805.130/TUV	30	3,10
7805.136/TUV	36	3,10

